General Notes:

Note for all four Sketchs

Reference Dwg. TBT10344.E1

Locations of new panels and power conditioner should be coordinated with building manager and government official present.
If location involves relocation of existing equipment, then this should not be an added cost to the government.
MC cable should be routed from new panels through conduit to existing skirts or new skirts.

SKETCH 1

Existing

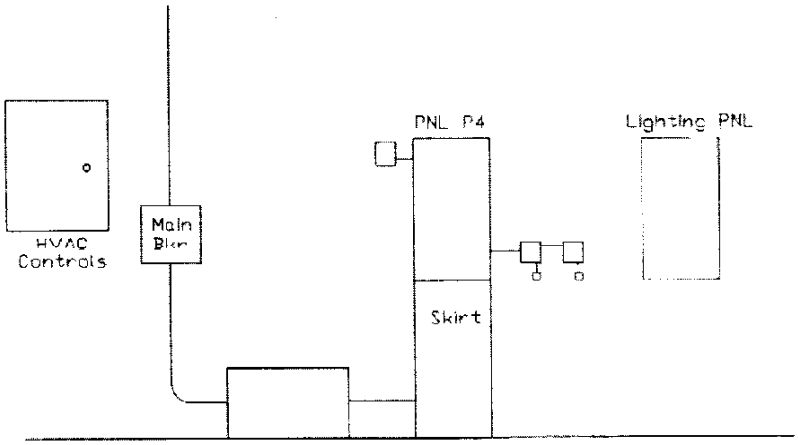

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

1. CONTRACT ID CODE	PAGE OF PAGES
See Block #2	1 of 1

2. AMENDMENT/MODIFICATION NO.	3. EFFECTIVE DATE	4. REQUISITION/PURCHASE REQ.NO.	5. PROJECT NO. *(If applicable)*
0002	20 JAN 2004		

6. ISSUED BY AEDC PKP CODE FA9101

AEDC/PKP
100 KINDEL DRIVE, SUITE A-332
ARNOLD AFB, TN 37389-1332
ALAN C. FUDGE 931-454-4406

alan.fudge@arnold.af.mil

7. ADMINISTERED BY *(If other than Item 6)* CODE

8. NAME AND ADDRESS OF CONTRACTOR *(No., street, county, State and ZIP Code)*

CODE FACILITY CODE

(X)	
	9A. AMENDMENT OF SOLICITATION NO. FA9101-04-B-0003
X	9B. DATED *(SEE ITEM 11)* 18 DEC 2003
	10A. MODIFICATION OF CONTRACT/ORDER NO.
	10B. DATED *(SEE ITEM 13)*

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

[X] The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers [ ] is extended, [X] is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods:

(a) By completing Items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA *(If required)*

13. THIS ITEM APPLIES ONLY TO MODIFICATION OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

(X)

A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: ( ) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. ITEM 10A.

B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES *(such as changes in paying office, appropriation data, etc.)* SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).

C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:

D. OTHER *(Specify type of modification and authority)*

E. IMPORTANT: Contractor [ ] is not, [ ] is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION *(Organized by UCF section headings, including solicitation/contract subject matter where feasible.)*

See attached list of questions received from potential bidders with the government's answers. Also, to clarify the solicitation drawings, four pages of sketches are attached. The bid opening date remains 2:00 local time, 28 January 2004.

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER *(Type or print)*		16A. NAME AND TITLE OF SIGNER *(Type or print)*	
		ALAN C. FUDGE	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA	16C. DATE SIGNED
(Signature of person authorized to sign)		BY *(Signature of Contracting Officer)*	

1. The 20A receptacles shown on Drawing E1 & E2, grouped together; are they existing or are they to be supplied by contractor?
These receptacles are existing.

2. The junction box shown in "Detail A" on drawing E1, is it existing or is it to be supplied by contractor?
The junction box is existing.

3. New Federal Pacific Electric molded case breakers are not available, can reconditioned breakers be used?
Yes

4. The mounting of the new panels as shown on the drawings, will not fit as indicated. Are we to field locate panels as close as possible to drawing location? Yes. See sketches provided.

5. Sect. 16120-2.1-C will an overall jacket be required on the M.C. cable in the trench? The metal clad is the overall jacket.

6 Can the work be done at normal hours 7:00 AM to 3:30PM? No, as indicated in spec. section 01010-1.5.

7. Will the furniture be moved from the trench covers by owner? Will it be replaced by owner? Contractors are responsible to move furniture from trench covers and replace furniture.

8. Detail on pageTBT10344.E2 (bottom right), does not reflect routing of new MC cable back into trench duct. Surface mounting? Yes

9. Section 16120-1 3.1 A References NEC 331.10, should this be 334.10 for MC cable? No, this should be 330.10.

10. AEDC-H005 Sanitation/Would restrooms in building be useable or will we have to provide facilities for this project? Use of facilities would be acceptable.

11. AEDC-H008 Utilities / Would facilities in building be useable, i.e. drinking fountains and general purpose receptacles (for a drill, band saw and threader)? Yes

12. Sheet E1 & E2 Duplex & Simplex receptacles on wall.
    a. Are they new or existing? Existing
    b. If they are new some are already existing do they demo? No demo of receptacles
    c. If existing plugmold stays do we refeed existing? Refeed the pre-wired plugmolds.

SKETCH 2

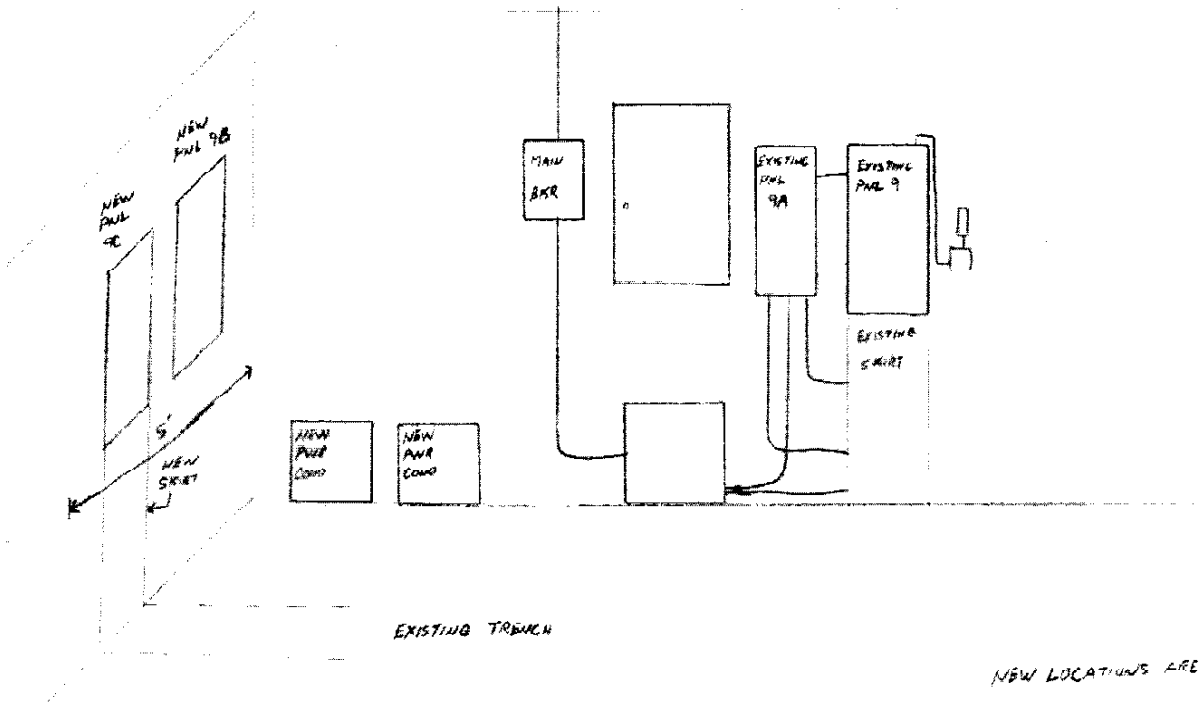

NEW LOCATIONS ARE APPROXIMATE

REFERENCE DWG TBT10344. E2 G-12

PANEL IS NOT TO EXCEED 5' FROM CORNER

NEW LOCATIONS ARE APPROXIMATE

REFERENCE

DWG TBT10344.E2 G-7

SKETCH 3

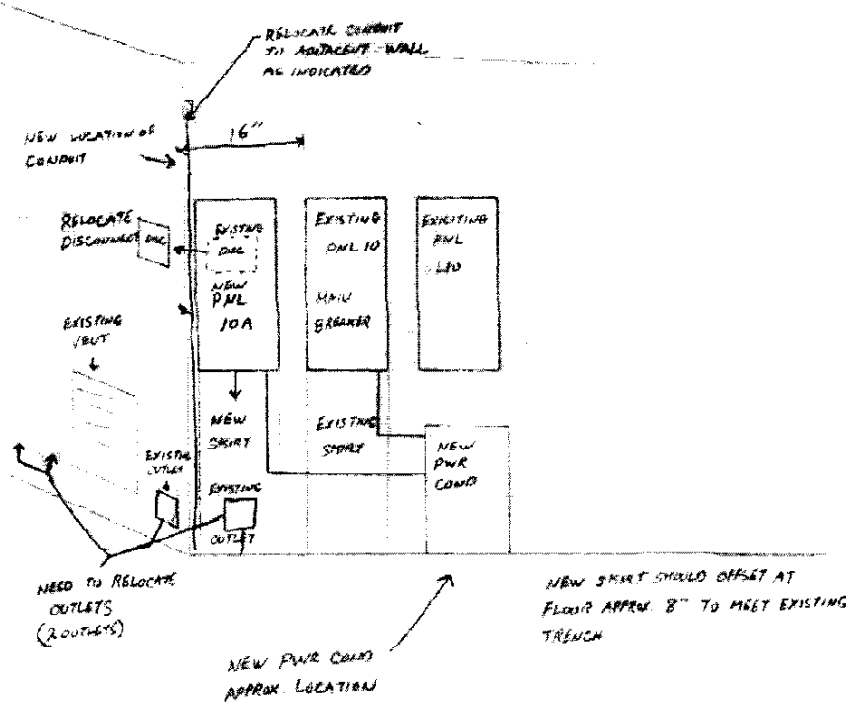

NEW LOCATIONS ARE APPROXIMATE.

REFERENCE DWG T8T10344.E1 D-11
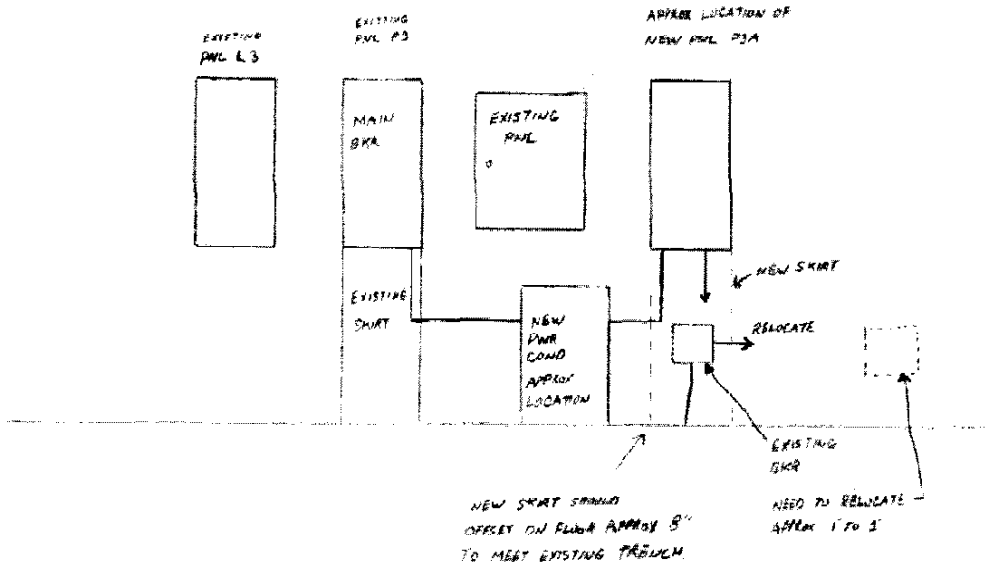
SKETCH 4